

# INSTALLATION INSTRUCTIONS

## MAXIM™ SERIES


### LED VAPOR TIGHT - WATERPROOF

### Features:

Product name: Vapor Tight  
 IP66 Rated  
 Suitable for Damp & Wet locations, All Indoor Applications  
 Operating voltage: AC 120-277V 50/60Hz  
 Driver: Meanwell driver  
 LED Type: Samsung 5630

### Technical data:

Model	Power	L(inch)	W(inch)	H(inch)	LF(inch)
MVT-40-38-C	38W	45.7	4.7	4.3	30
MVT-40-38-F					
MVT-50-38-C					
MVT-50-38-F					
MVT-40-48-C	48W	45.7	4.7	4.3	30
MVT-40-48-F					
MVT-50-48-C					
MVT-50-48-F					
MVT-50-75-C	75W	61.4	4.7	4.3	43
MVT-50-75-F					



### Safety Notice:

1. Electrical installation should be performed by a licensed electrician only
2. Disconnect the luminaire from the power supply and let cool down before any maintenance is performed. All maintenance should be performed by a licensed electrician only!
3. Never touch the LED's while luminaire is energized
4. Please contact your local representative for more information

# Instruction of installation:

These waterproof luminaires may be wall mounted (Above 4 ft from the ground) or ceiling mounted, are IP66 rated, and are suitable for damp and wet location applications, as well as all indoor applications

Note: DO NOT drill holes on any part of the luminaire




## Mounting

Drill 0.234 hole and press 6x30 screw anchor in the wall, fix the mounting bracket on the wall by St4x30 bolt

Turn off the power

Insert screw anchor in the mounting surface, attach mounting brackets with screws

A




C


Open the clips See A below

Remove diffuser See B below


Remove gear tray See C below



A



B




C

D


1 Loosen the nut of the cable gland, put the cable through the cable gland.

2 Connect the cable on the terminal block as below shown and tighten the cable gland

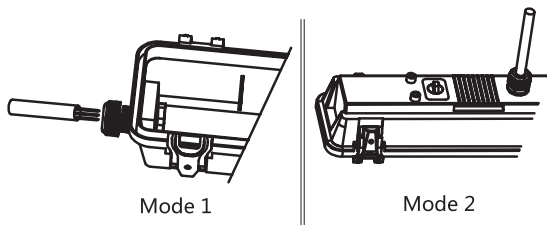



Mode 1

Mode 2


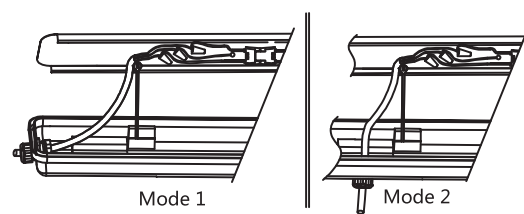


Mode 1



Mode 2

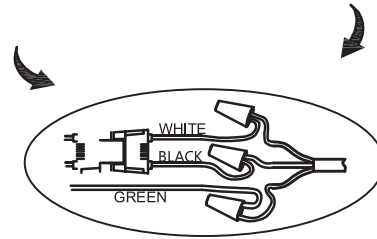

**E** Affix gear tray to the housing

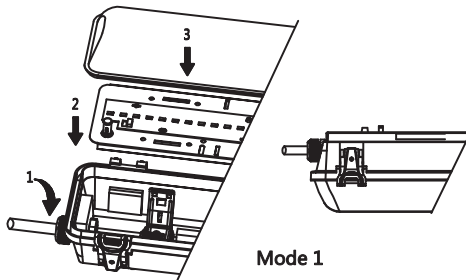

**F** 1. Snap the fixture into the mounting clips. Confirm that the fixture is securely mounted

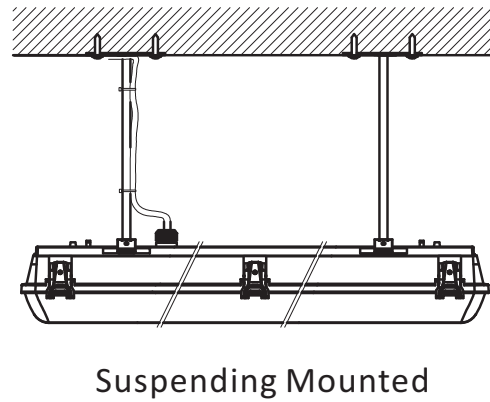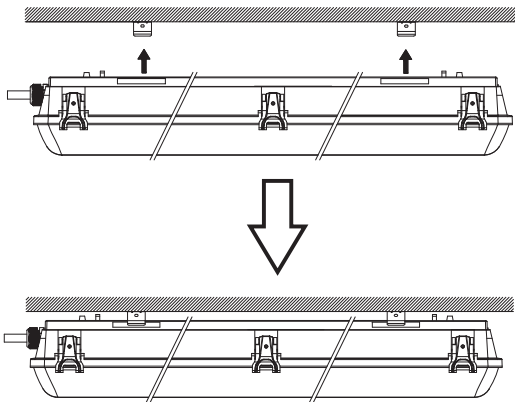

2. If wall mounted, suitable for mounting within 4 ft of the ground

**G** Turn on the power

